

bizhub C3351

Colour A4 multifunctional ✓ Up to 33 pages per minute

Functionality




DATASHEET bizhub C3351

Technology

Emperon™ – print controller	Easily compatible with different users and IT environments through Konica Minolta's unified print technology	4
Simitri® HD – polymerised toner	Delivers high print quality and yet ensures reduced print spending as well as lower environmental impact	4
OpenAPI – solution platform	Server-based applications provide efficient workflows for the entire MFP fleet	4
i-Option – special feature	Offers extended scope and advanced MFP functionality in line with individual requirements	4
CSRC – remote service	Keeps productivity up with online monitoring of devices and consumables through the Konica Minolta service	4
IWS – panel customisation	Improved user-device interaction and enhanced productivity through full MFP panel customisation	4

Option diagram

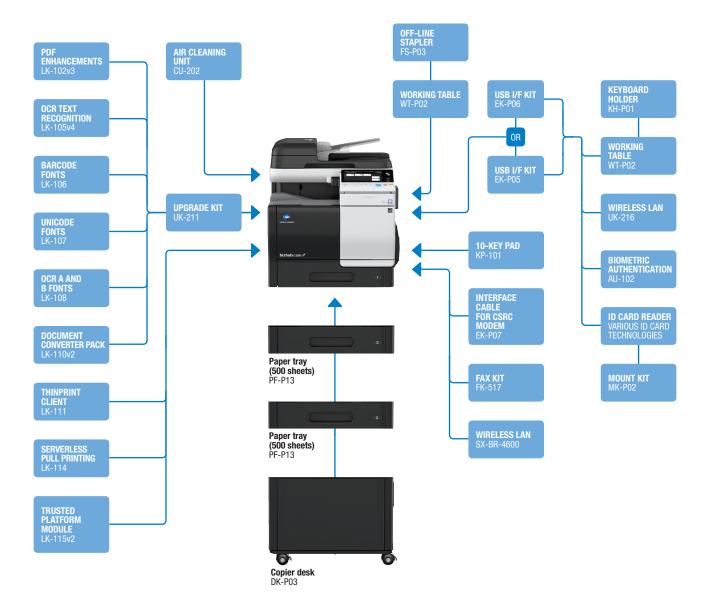

Finishing functionalities



Descriptions

A4 multifunctional with 33 ppm b/w and colour.
Standard Emperon [™] print controller with PCL, PostScript
and XPS support. Paper capacity of 550 sheets and
100-sheet manual bypass. Automatic duplex document
feeder and duplex unit standard. 2 GB memory,
250 GB hard disk.
A4, 500 sheets, 60-90 g/m ²
Provides storage space for print media, etc.
20-sheet corner stapling
For use instead of touchscreen
Off-line stapler placement, etc.
Super G3 fax, digital fax functionality
GPRS modem connection for CSRC
Various ID card technologies
PDF/A (1b), PDF encryption, digital signature
Searchable PDF and PPTX, PDF/A (1a)
Supports native barcode printing
Supports native Unicode printing

LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document	Generates various file formats incl. DOCX, XLSX and
converter pack	PDF/A
LK-111 ThinPrint® client	Print data compression for reduced network impact
LK-114 Serverless Pull	Secure and Follow Me printing solution requiring no
Printing	server application. Host device requires 4 GB memory.
	(Available from April 2017)
LK-115v2 TPM activation	Trusted Platform Module for protection of data
	encryption and decryption
MK-P02 Mount kit	Installation kit for ID card reader
UK-216 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
SX-BR-4600 Wireless LAN	Wireless LAN to network connector
CU-202 Air cleaning unit	Improving Indoor Air Quality by reduced emissions
EK-P05 USB I/F kit	USB keyboard connection
EK-P06 USB I/F kit	USB keyboard connection, Bluetooth
UK-211 Upgrade kit	2 GB memory extension for upgrades
KH-P01 Keyboard holder	To place USB keyboard
AU-102 Biometric	Finger vein scanner
authentication	

Technical specifications

SYSTEM SPECIFICATI	ONS
System memory	2 GB/4 GB
(standard/max)	
System hard disk	250 GB (standard)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0; Wi-Fi 802.11b/g/n
	(optional)
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP; HTTP; HTTPS
Frame types	Ethernet 802.2; Ethernet 802.3; Ethernet II; Ethernet SNAP
Automatic document	Up to 50 originals; A5-A4; 50-128 g/m ² ;
feeder	reverse automatic document feeder
Printable paper size	A6-A4; customised paper sizes
Printable paper weight	60-210 g/m ²
Paper input capacity	650 sheets/1,650 sheets
(standard/max)	
Paper tray input	550 sheets; A6 – A4, 60 – 210 g/m ²
(standard)	
Paper tray input	2 x 500 sheets; A4, 60 – 90 g/m ²
(optional)	
Manual bypass	100 sheets; A6 – A4; custom sizes; 60 – 210 g/m ²
Automatic duplexing	A4; 60–210 g/m ²
Finishing modes	Staple (off-line)
(optional)	
Output capacity	Max.: 250 sheets
Stapling (optional)	Max.: 20 sheets (off-line stapling)
Copy/print volume	Rec.: 6,500 pages
(monthly)	Max. ¹ : 96,000 pages
Toner lifetime	K:13,000; CMY: 12,000 pages
Imaging unit lifetime	K: 60,000; CMY: 50,000 pages
Power consumption	220-240 V/50/60 Hz; Less than 1.7 kW
System dimensions	555 x 584 x 603 mm
(W x D x H)	
System weight	Approx. 49.2 kg (without options)

Print resolution	600 x 600 dpi
	1,200 x 1,200 dpi (reduced speed)
Page description	PCL 6 (XL 3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS
language	
Operating systems	Windows Vista (32/64)
	Windows 7 (32/64)
	Windows 8 (32/64)
	Windows 10 (32/64)
	Windows Server 2008 (32/64)
	Windows Server 2008 R2
	Windows Server 2012
	Windows Server 2012 R2
	Windows Server 2016
	Macintosh OS X 10.x
	Linux
	Unix
	Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Print functions	Direct print of TIFF; XPS; PDF (v1.7) and OOXML (DOCX,
	XLSX, PPTX); secure print; combination; n-up; poster;
	booklet page order; watermark
Mobile Printing	AirPrint (iOS); Mopria (Android); Google Cloud Print (optional);
	WiFi Direct (optional); Konica Minolta Print Service (Android);
	PageScope Mobile (iOS/Android/Windows 10 Mobile)
SCANNER SPECIFIC	ATIONS
Scan speed	Up to 35 ipm
(mono/colour)	
•	Up to 600 x 600 dpi
(mono/colour)	Up to 600 x 600 dpi Scan-to-eMail (Scan-to-Me)
(mono/colour) Scan resolution	
(mono/colour) Scan resolution	Scan-to-eMail (Scan-to-Me)
(mono/colour) Scan resolution	Scan-to-eMail (Scan-to-Me) Scan-to-SMB (Scan-to-Home)
(mono/colour) Scan resolution	Scan-to-eMail (Scan-to-Me) Scan-to-SMB (Scan-to-Home) Scan-to-FTP
(mono/colour) Scan resolution	Scan-to-eMail (Scan-to-Me) Scan-to-SMB (Scan-to-Home) Scan-to-FTP Scan-to-HDD
(mono/colour) Scan resolution	Scan-to-eMail (Scan-to-Me) Scan-to-SMB (Scan-to-Home) Scan-to-FTP Scan-to-HDD Scan-to-USB
(mono/colour) Scan resolution	Scan-to-eMail (Scan-to-Me) Scan-to-SMB (Scan-to-Home) Scan-to-FTP Scan-to-HDD Scan-to-USB Scan-to-WebDAV
(mono/colour) Scan resolution	Scan-to-eMail (Scan-to-Me) Scan-to-SMB (Scan-to-Home) Scan-to-FTP Scan-to-HDD Scan-to-USB Scan-to-WebDAV Scan-to-URL
(mono/colour) Scan resolution Scan modes	Scan-to-eMail (Scan-to-Me) Scan-to-SMB (Scan-to-Home) Scan-to-FTP Scan-to-HDD Scan-to-USB Scan-to-WebDAV Scan-to-URL Network TWAIN scan
(mono/colour) Scan resolution Scan modes	Scan-to-eMail (Scan-to-Me) Scan-to-SMB (Scan-to-Home) Scan-to-FTP Scan-to-HDD Scan-to-USB Scan-to-UBL Scan-to-URL Network TWAIN scan JPEG; TIFF; PDF; PDF/A (1b); Compact PDF; encrypted PDF;



DATASHEET bizhub C3351

COPIER SPECIFICATIONS

Copying process	Electrostatic laser copy; tandem; indirect
Toner system	Simitri [®] HD polymerised toner
Copy/print speed A4	Up to 33 ppm
(mono/colour)	
Autoduplex speed A4	Up to 33 ppm
(mono/colour)	
1st copy out time	8.1/9.1 sec.
(mono/colour)	
Warm-up time	Approx. 20 sec. ²
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	Max. A4
Magnification	25–400% in 0.1% steps; auto-zooming
Copy functions	Electronic sorting; multi-job; adjustments (contrast, sharp-
	ness, image density); proof copy; interrupt mode; colour
	mode; separate scan; sort/group; combination; original
	selection; ID card copy; 2-in1; 4-in-1

SYSTEM FEATURES	
Security	IS015408 Common Criteria (in evaluation);
	IP filtering and port blocking;
	SSL2; SSL3 and TLS1.0 network communication;
	IPsec support; IEEE 802.1x support; user authentication;
	secure print; hard disk overwrite (8 standard types);
	hard disk data encryption; copy protection (print only)
Accounting	Up to 1,000 user accounts;
	Active Directory support ID card authentication optional
Software	PageScope Net Care Device Manager
	PageScope Direct Print
	Print Status Notifier
	Download Manager
	Driver Packaging Utility

¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

² Warm-up time may vary depending on the operating environment and usage

FAX SPECIFICATIONS

Fax standard	Super G3 (optional)
Fax transmission	Analogue
	i-Fax
Fax resolution	Up to 600 x 600 dpi (ultra-fine)
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,100 (single + group)
Fax functions	Time shift; PC-Fax; fax forwarding; up to 400 program dials

- All specifications refer to A4-size paper of 80 g/m² quality.

- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
 The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
 The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity. Some of the product illustrations contain optional accessories.
- Some of the product illustrations contain optional accessories.
 Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
 Konica Minolta does not warrant that any specifications mentioned will be error-free.

- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.



Konica Minolta Business Solutions / Miles Gray Road / Basildon / Essex / SS14 3AR / 0800 833864 / info@konicaminolta.co.uk / www.konicaminolta.co.uk 🗹 @konicaminoltagb 🖬 facebook.com/KonicaMinoltaBusinessSolutionsUKLtd 🛅 linkedin.com/company/konica-minolta-business-solutions-uk-ltd